




Technical Sheet ■

Model OA42 Series

Manual Activation

Bi-Level Outdoor Tubular Bottle Filling Station

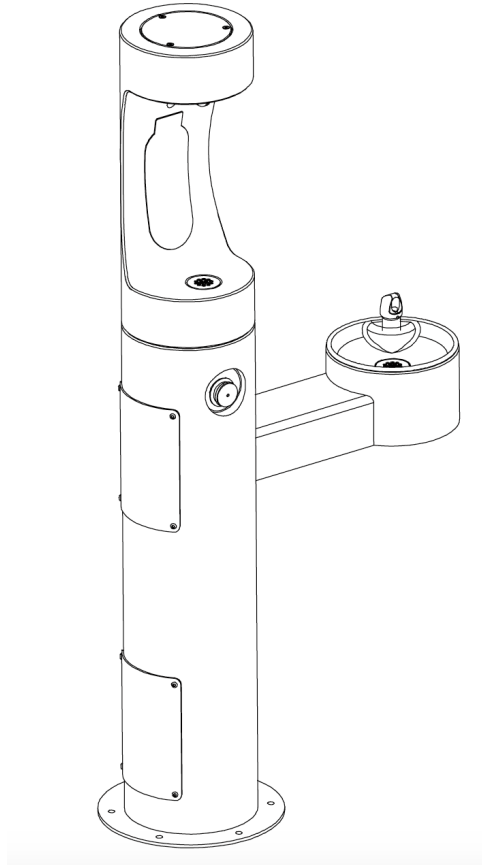

General

Pedestal steel outdoor dual station fountain with bottle filling station. Rounded corner design with power coat finish for year-round beauty with minimum maintenance.

The E-Coat immersion process coats the outside and inside of the unit for the ultimate corrosion protection. Fountain is pre-built and fully water and pressure tested to ensure no leaks and proper function for reduced installation time and added peace of mind.

In keeping with our policy of continuing product improvement, OASIS reserves the right to change product specifications without notice.

Construction

Heavy-duty steel construction with rounded design. Laminar flow minimizes splash and allows easy maintenance.

Bottle Filler

Quick fill rate at 1 gallon per minute.

Bubbler

Vandal-resistant bubbler is one-piece, chrome plated. Unit has integral hood guard design to prevent contamination from other users, airborne deposits and tampering.

Basin

Contour-formed stainless steel design with rounded edges reduces splatter, ensures proper drainage and prevents standing water.

Pushbutton Activation Mechanism

Self-closing, vandal-resistant push button does not require grasping or twisting.

Inlet Strainer

Easily cleaned in-line strainer screen traps particles of 140 microns or larger before they enter the waterway.

Access Panels

Manufactured of heavy-gauge steel with vandal resistant screws. Provides access for easy hook-up of all plumbing connections.

Applications

Perfect for either public or private outdoor settings, the OA42 is a great fit in areas where aesthetics are important to the overall appeal of the architecture. Suitable in areas where weather conditions exist, this series stands strong as a nice addition to any community. Powder-coated finish helps to maintain the fountain's overall appeal so it remains looking asnew as it did when it was installed. This type of pedestal drinking fountain may also be placed in a variety of settings such as: parks, schools, and other outdoor environments around office buildings where the temperature remains above freezing.

Finish

Standard Finish is Evergreen powder-coat.

Options

Available with single or dual bottle fillers.


Mounting Instructions & Plumbing Connections.

Mount on a smooth, flat, finished surface with adequate support (300 lb. load maximum). Secure unit with six 3/8" minimum screws or anchor bolts (not provided). Refer to rough-in.


Water supply 3/8" O.D. unplated copper tube. Waste 1-1/4" IPS.

Trap and service stop not included.

Operating Pressures: Supply water:: 20 - 105 psi maximum.

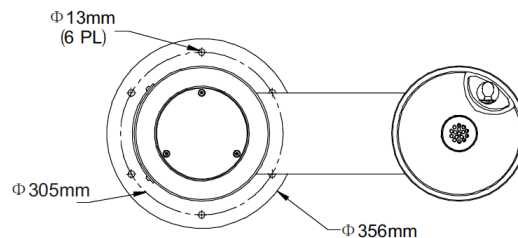

TOP VIEW

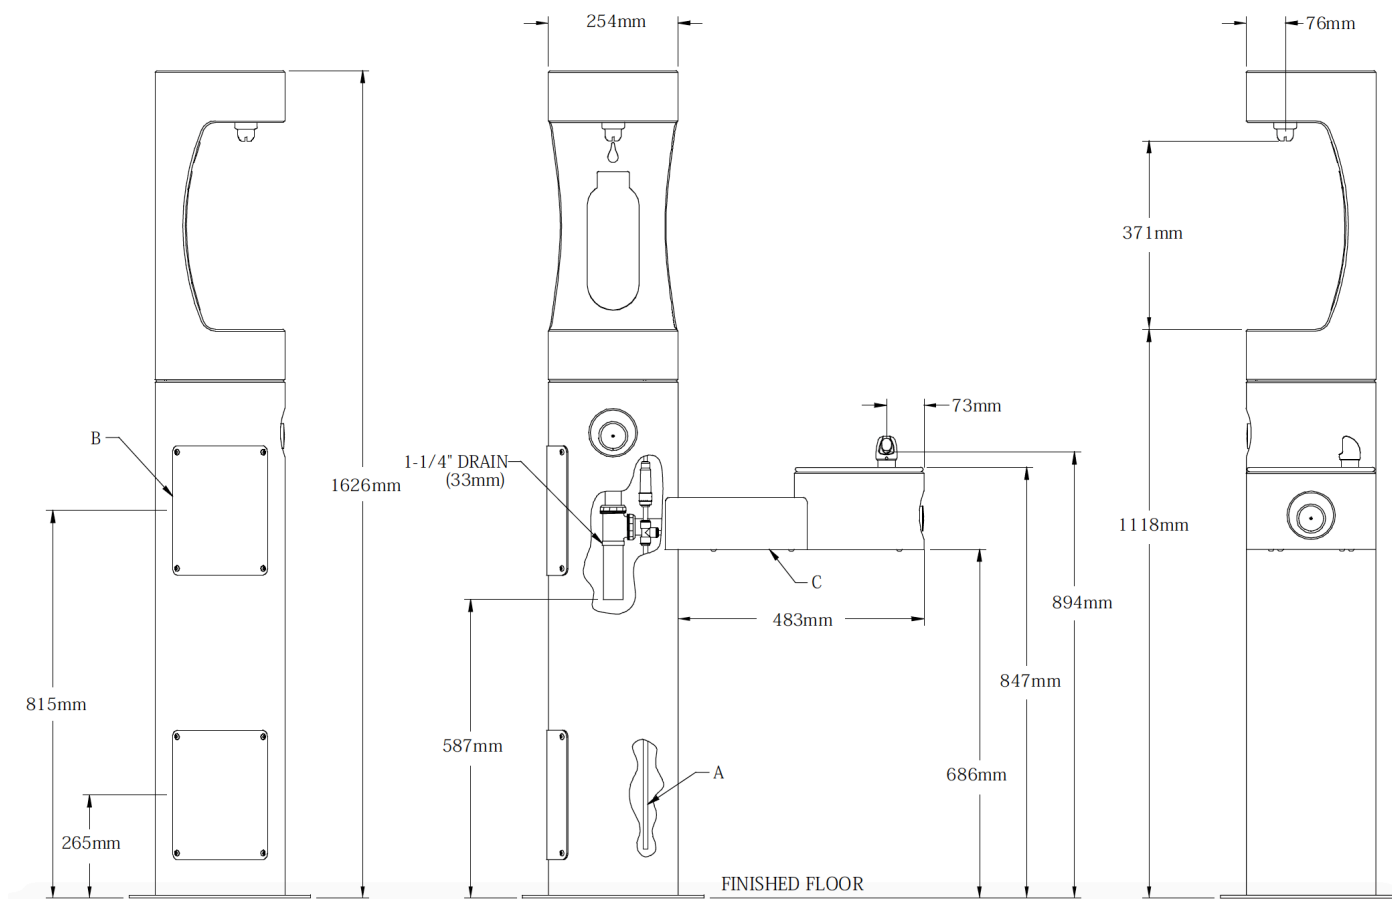

LEGEND

A = 3/8" O.D. UNPLATED COPPER TUBE CONNECT - SHUT OFF VALVE BY OTHERS

B = ACCESS PANEL (170mm X 190mm)

C = REMOVABLE BOTTOM COVER

www.oasis.ie

info@oasis.ie

OASIS IRELAND

Bunree Industrial Estate, Ballina,
Co. Mayo, Ireland, F26 D5R3.
+353 96 71222

OASIS POLAND

ul. Gutenberga 20,
44-164, Gliwice, Poland
+48 32 332 65 01